


Ready To Go

SimpleSpec 200.30™


Installation Manual

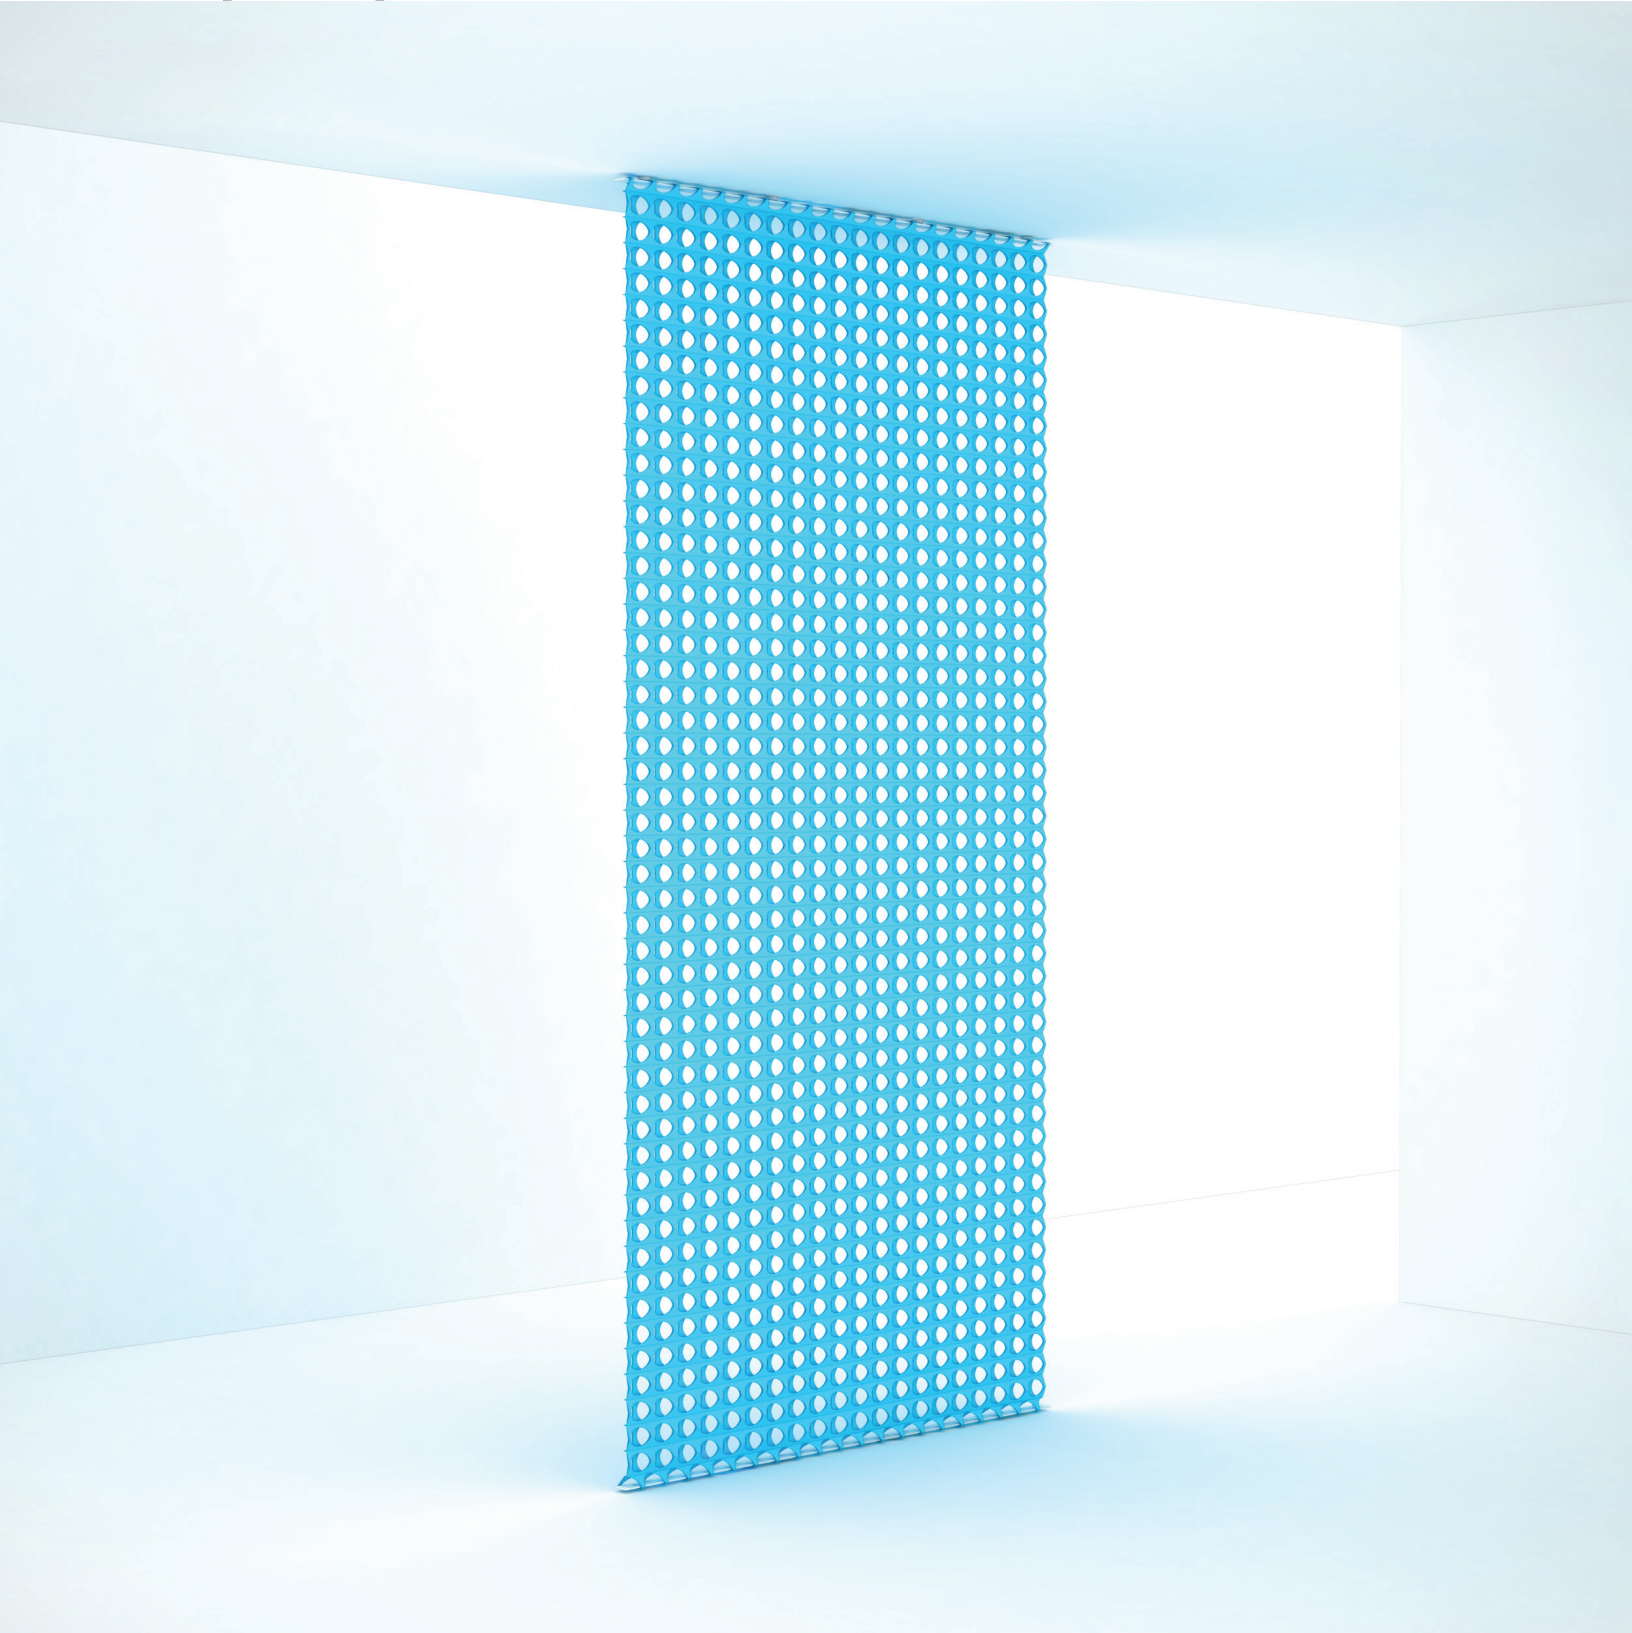


For more information, please visit 3-form.com or call 800.726.0126

JUNE 2017 | MAN-RTG-200-30 | REV 001 © 2017 3form, Inc. All rights reserved.


Contents Overview



Screen



Steel Bar



Velcro Straps



Magnets



End Caps



Anchors




Screws




Spacers

Installation


Required Tools

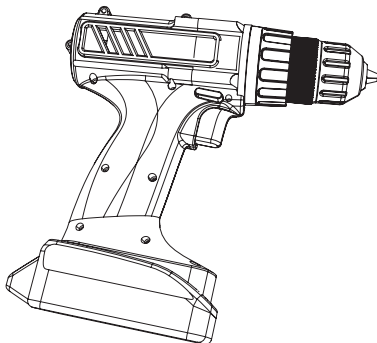

Drill



Metal and Wood
Drill Bits




Phillips Screwdriver


Installation

1 Install Partition


- a** Using the steel bar as a template, position it in the desired location on the ceiling and drill holes into the ceiling according to the pre-drilled holes in the bar.

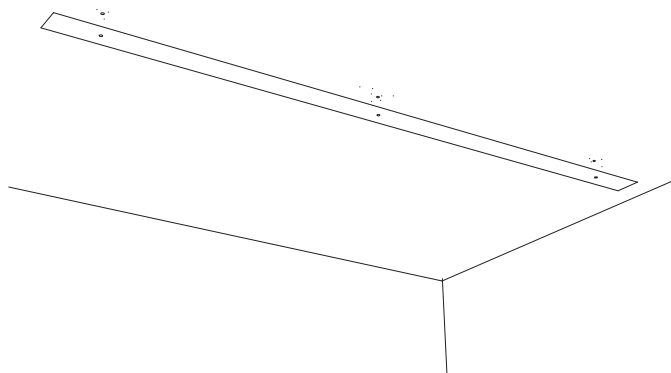


- b** Fasten magnets to the ceiling.

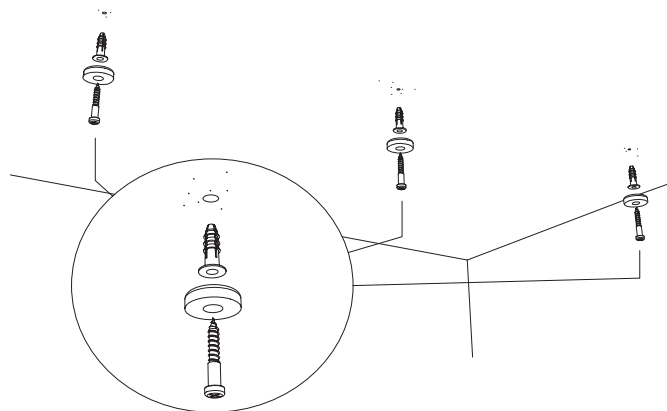

- c** Slide the steel bars through the top and the bottom of the screen. Place the end caps on each end of the steel bars.

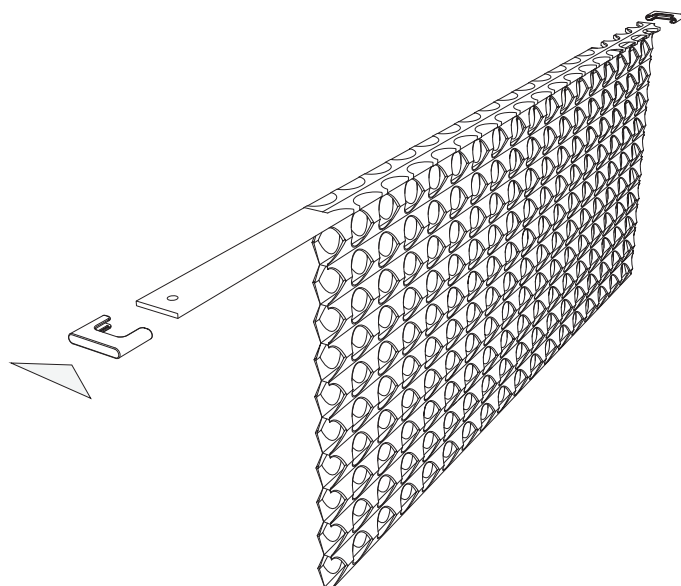


- d** Suspend the screen from the magnets.

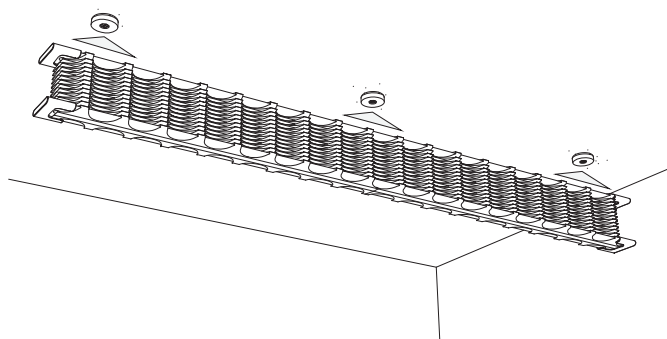

Installation


1 Install Partition *cont...*

- e** Lower the screen to the floor.

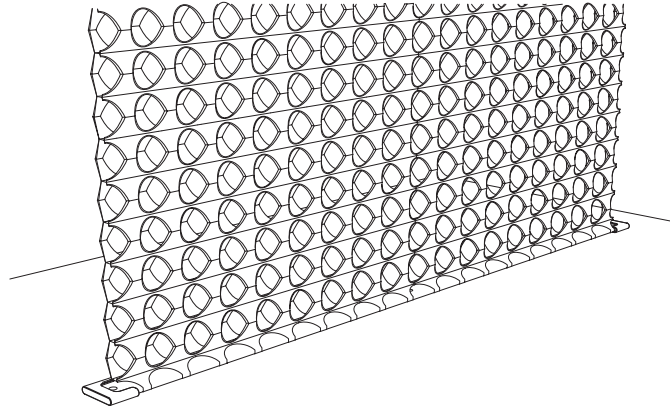


2 Secure Partition - *Optional*

- a** Fasten each end of the top and/or bottom of the steel bars by drilling holes into the ends of the bars.

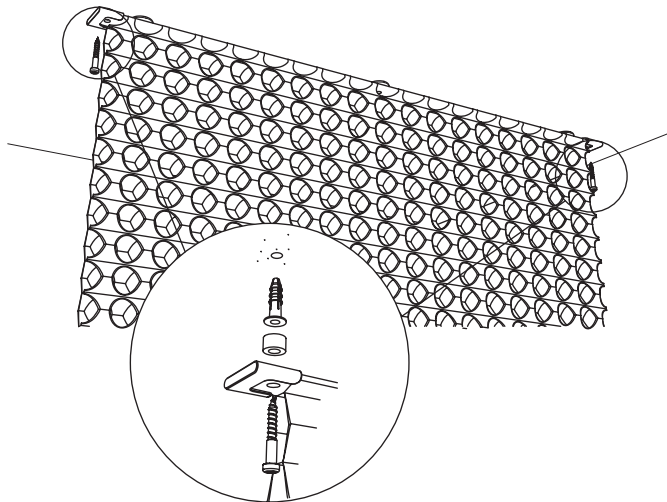

- b** Screen may be secured with velcro straps to temporarily move the screen.

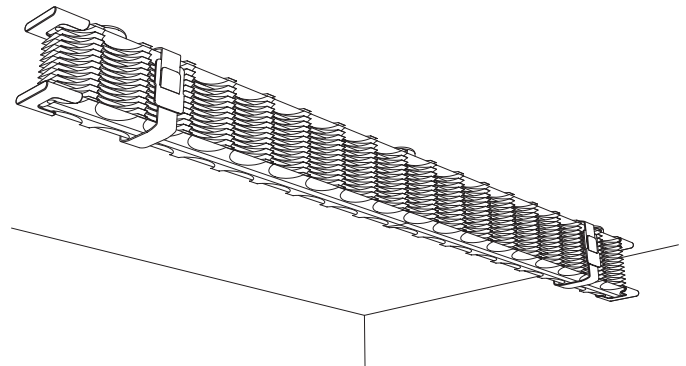

Product Description

Create innovative spaces with lightweight and expandable Parametre 3D-textile systems. Made of 100% non-woven polyester, this flexible textile can be used in a variety of residential and commercial applications.


Specification

Innovative 3D textile system, redefining space. Create shade, shadow and light with Parametre™ by 3form.


- 100% Polyester
- Commercial and Residential Applications
- Horizontal and Vertical Systems
- Class A Fire Rated
- Greenguard Indoor Air Quality Certified
- Three Standard Sizes
- Custom Sizing up to 14' W × 14' L
- UV Treated
- Anti-Microbial and Anti-Static
- Cleans Easily
- Standard Hardware Included for Quick Installation
- Cable Hardware Available
- Drop Ceiling Hardware Available

Sizes

Any size up to 14' W × 14' L
*Custom Lengths greater than 14' are also available.

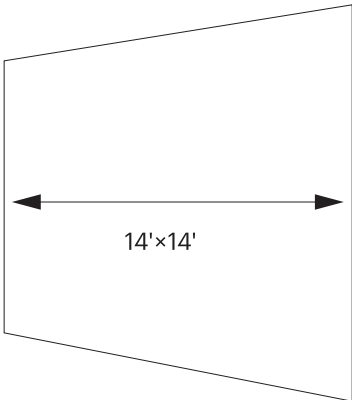

Patterns

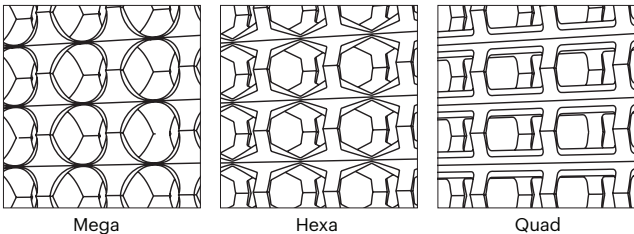

Colors

- Aquamint

Bisque

Canvas

Charcoal

Colonial Blue

Cool Grey

Coffee Bean
- Denim Blue

Eggshell White

Green Apple

Ruby

Red Sage

Silver Metallic

Terracotta

Flammability and Smoke Test Results

- Building Code Approvals

Parametre has been independently tested and meet the criteria for approved interior finishes and light transmitting resin materials as described in the 2009 International Building Code®.

Test	3form Parametre Grade 1	Result
ASTM E84-03 Flame Spread Smoke generated	0 30	Class A: 0-25 ≤450
NFPA 701 Method 1 Method 2	Pass Pass	Meets Requirements Meets Requirements

Test	3form Parametre Grade 2	Result
ASTM E84-03 Flame Spread Smoke generated	0 120	Class A: 0-25 ≤450
NFPA 701 Method 1 Method 2	Pass Pass	Meets Requirements Meets Requirements

Weight

Weight Flux (lb/ft²) 0.042 lb/ft² (0.205kg/m²)

Cleaning Instructions

Remove dust with compressed air or feather duster. Remove dirt with spot treatment or by rinsing with water (mild detergent solution only)